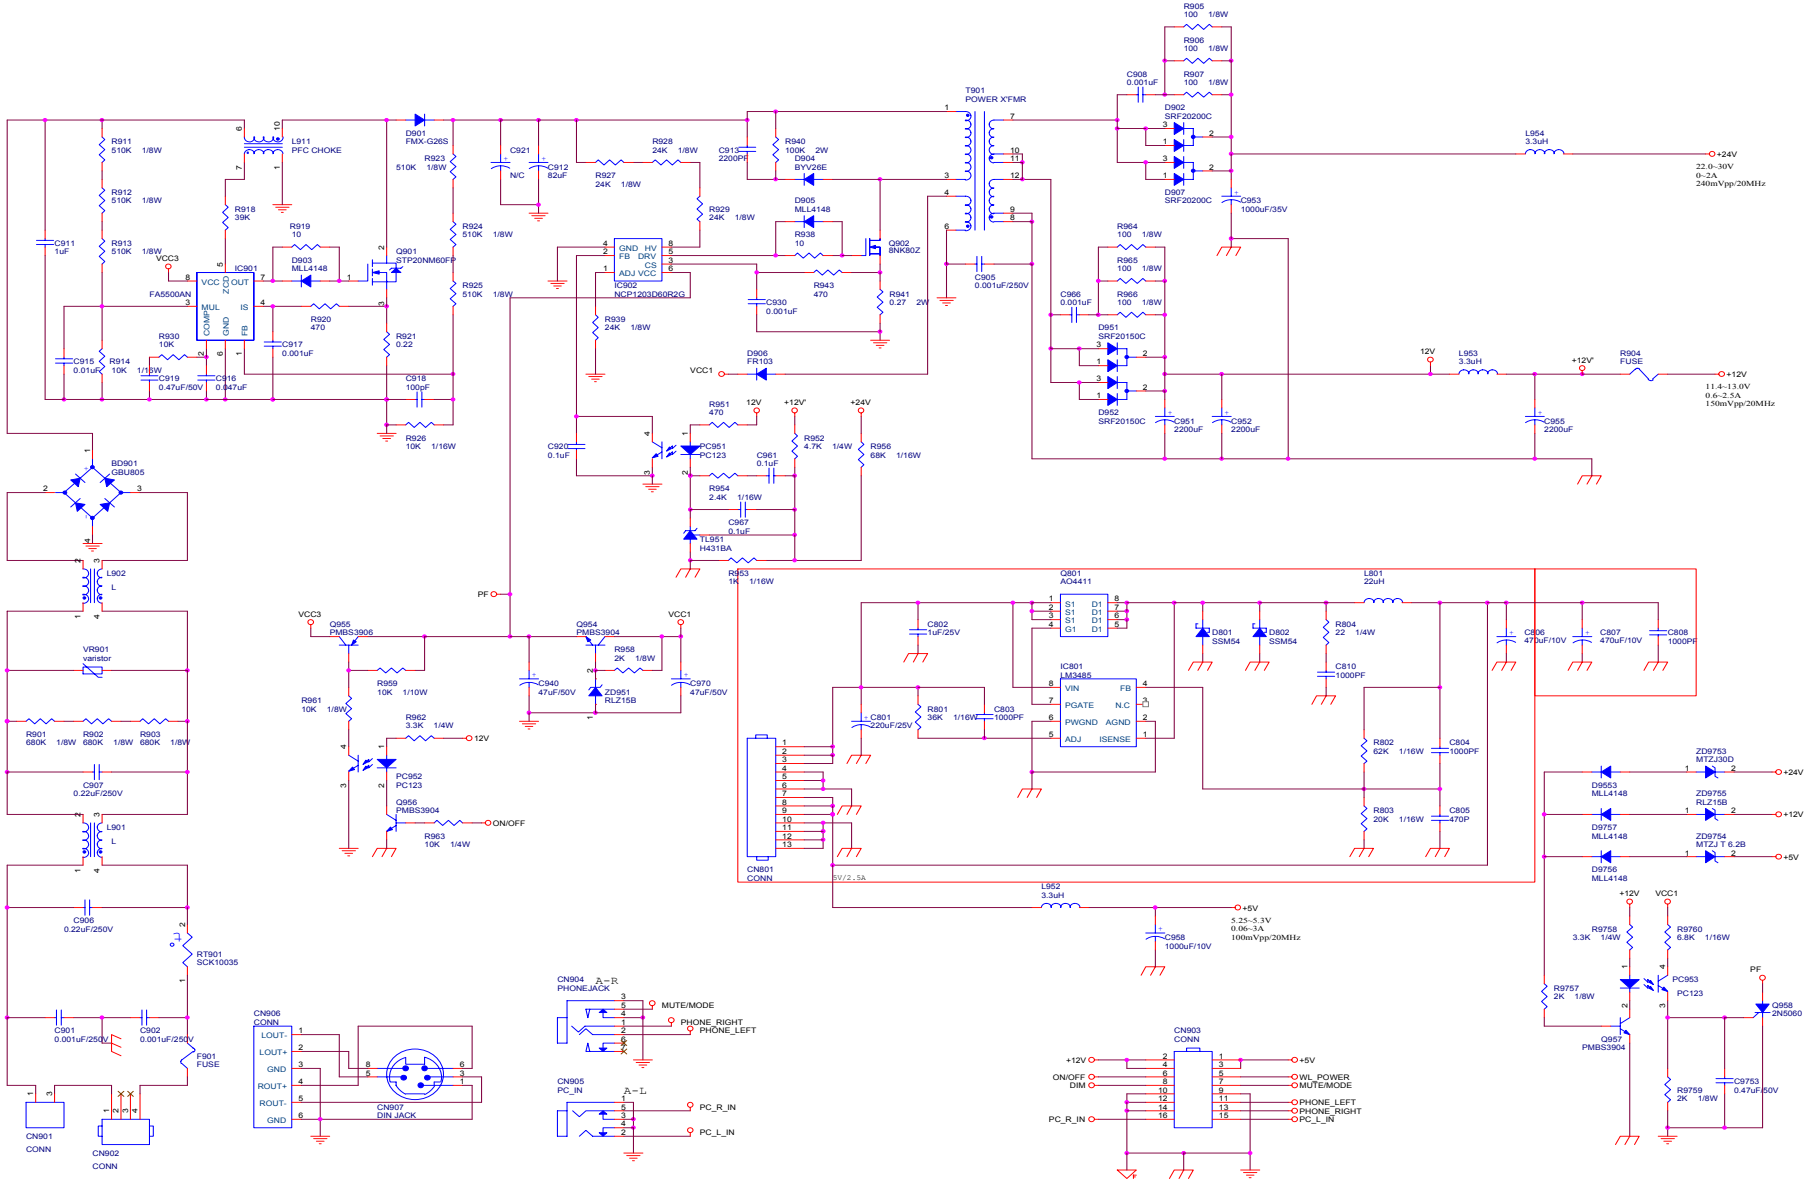
R911 510K 1/8W
R912 510K 1/8W
R913 510K 1/8W
R914 10K 1/8W
C911 1uF
C915 0.01uF
R930 10K
C919 0.47uF/50V
C916 0.047uF
VCC3
IC901
FA5500AN
VCC
OUT
MUL
IS
COMP
GND
FB
L911 PFC CHOKE
R918 39K
R919 10
D903 MLL4148
C917 0.001uF
R920 470
D901 FMX-G26S
R923 510K 1/8W
R924 510K 1/8W
R925 510K 1/8W
R921 0.22
C918 100pF
R926 10K 1/16W
Q901 STP20NM60FP
C921 N/C
C912 82uF
R928 24K 1/8W
R927 24K 1/8W
R929 24K 1/8W
R939 24K 1/8W
C913 2200PF
R940 100K 2W
D904 BYV26E
D905 MLL4148
R938 10
Q902 BNKB0Z
R943 470
C930 0.001uF
R941 0.27 2W
IC902
NCP1203D60R2G
GND HV
FB DRV
CS
ADJ VCC
T901
POWER XFMR
C905 0.001uF/250V
D906 FR103
VCC1
R905 100 1/8W
R906 100 1/8W
R907 100 1/8W
C908 0.001uF
D902 SRF20200C
D907 SRF20200C
C953 1000uF/35V
L954 3.3uH
+24V
22.0~30V
0~2A
240mVpp/20MHz
R964 100 1/8W
R965 100 1/8W
R966 100 1/8W
C966 0.001uF
D951 SRF20150C
D952 SRF20150C
C951 2200uF
C952 2200uF
12V
L953 3.3uH
+12V'
R904 FUSE
+12V
11.4~13.0V
0.6~2.5A
150mVpp/20MHz
C955 2200uF
C920 0.1uF
PC951 PC123
R951 470
R952 4.7K 1/4W
R956 68K 1/16W
C961 0.1uF
R954 2.4K 1/16W
C967 0.1uF
TL951 H431BA
R953 1K 1/16W
BD901 GBU805
L902 L
VR901 varistor
R901 680K 1/8W
R902 680K 1/8W
R903 680K 1/8W
C907 0.22uF/250V
L901 L
C906 0.22uF/250V
RT901 SCK10035
C901 0.001uF/250V
C902 0.001uF/250V
F901 FUSE
CN901 CONN
CN902 CONN
PF
VCC3
Q955 PMBS3906
Q954 PMBS3904
VCC1
R958 2K 1/8W
C940 47uF/50V
ZD951 RLZ15B
C970 47uF/50V
R959 10K 1/10W
R961 10K 1/8W
R962 3.3K 1/4W
12V
PC952 PC123
Q956 PMBS3904
ON/OFF
R963 10K 1/4W
Q801 AO4411
S1 D1
S1 D1
S1 D1
G1 D1
L801 22uH
C802 1uF/25V
D801 SSM54
D802 SSM54
R804 22 1/4W
C810 1000PF
C806 470uF/10V
C807 470uF/10V
C808 1000PF
IC801 LM3485
VIN FB
PGATE N.C
PWGND AGND
ADJ ISENSE
C801 220uF/25V
R801 36K 1/16W
C803 1000PF
R802 62K 1/16W
C804 1000PF
R803 20K 1/16W
C805 470P
CN801 CONN
5V/2.5A
L952 3.3uH
+5V
5.25~5.3V
0.06~3A
100mVpp/20MHz
C958 1000uF/10V
ZD9753 MTZJ30D
D9753 MLL4148
ZD9755 RLZ15B
D9757 MLL4148
ZD9754 MTZJ T 6.2B
D9756 MLL4148
+12V
VCC1
R9758 3.3K 1/4W
R9760 6.8K 1/16W
PC953 PC123
R9757 2K 1/8W
Q957 PMBS3904
R9759 2K 1/8W
C9753 0.47uF/50V
Q958 2N5060
CN906 CONN
LOUT-
LOUT+
GND
ROUT+
ROUT-
GND
CN907 DIN JACK
CN904 PHONEJACK
A-R
MUTE/MODE
PHONE_RIGHT
PHONE_LEFT
CN905 PC_IN
A-L
PC_R_IN
PC_L_IN
CN903 CONN
+12V
ON/OFF DIM
PC_R_IN
+5V
WL_POWER MUTE/MODE
PHONE_LEFT
PHONE_RIGHT
PC_L_IN

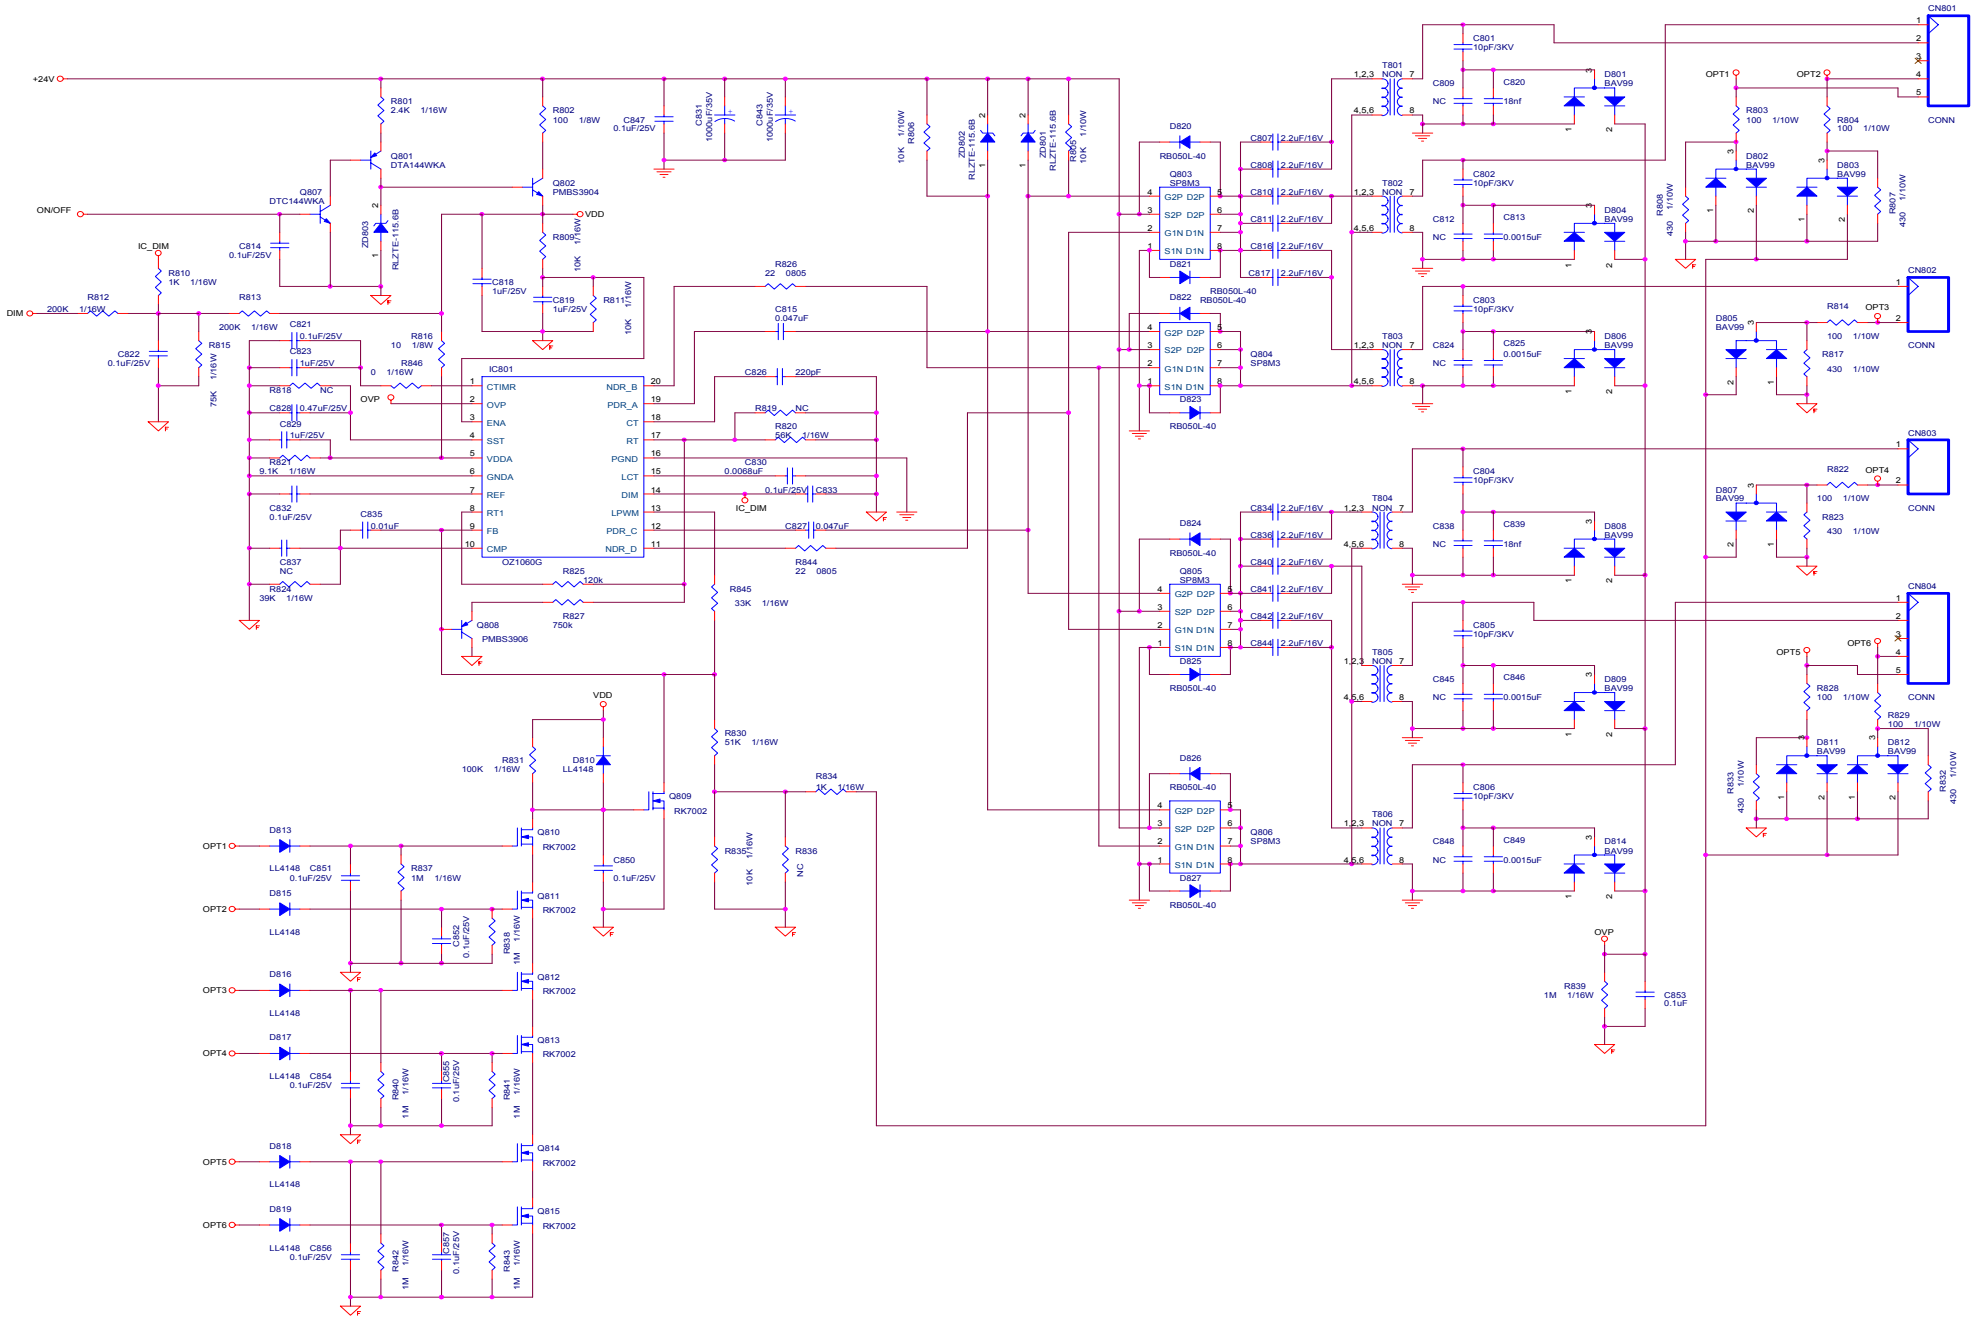
+24V
ON/OFF
DIM
IC_DIM
OVP
VDD
IC801
OZ1060G
CTIMR
OVP
ENA
SST
VDDA
GNDA
REF
RT1
FB
CMP
NDR_B
PDR_A
CT
RT
PGND
LCT
DIM
LPWM
PDR_C
NDR_D
Q801 DTA144WKA
Q802 PMBS3904
Q807 DTC144WKA
Q808 PMBS3906
Q809 RK7002
Q810 RK7002
Q811 RK7002
Q812 RK7002
Q813 RK7002
Q814 RK7002
Q815 RK7002
Q803 SP8M3
Q804 SP8M3
Q805 SP8M3
Q806 SP8M3
D810 LL4148
D820 RB050L-40
D821 RB050L-40
D822 RB050L-40
D823 RB050L-40
D824 RB050L-40
D825 RB050L-40
D826 RB050L-40
D827 RB050L-40
T801 NON
T802 NON
T803 NON
T804 NON
T805 NON
T806 NON
D801 BAV99
D802 BAV99
D803 BAV99
D804 BAV99
D805 BAV99
D806 BAV99
D807 BAV99
D808 BAV99
D809 BAV99
D811 BAV99
D812 BAV99
D814 BAV99
CN801
CN802
CN803
CN804
CONN
OPT1
OPT2
OPT3
OPT4
OPT5
OPT6
ZD801 RLZTE-115.6B
ZD802 RLZTE-115.6B
ZD803 RLZTE-115.6B